

CASE 1

NOTES:

1. CONTRACTOR TO EXPOSE THE EXISTING VALVE BOX FOR THE WATER UTILITY INSPECTOR TO DETERMINE CONDITION OF EXISTING BOX. INSPECTOR SHALL DIRECT CONTRACTOR TO ADJUST EXISTING VALVE BOX FLUSH TO GRADE AS SHOWN ABOVE, OR REPLACE THE TOP SECTION OF VALVE BOX AS SHOWN IN DETAIL W-152 SHEET 2 OR DIRECT CONTRACTOR TO REMOVE AND REPLACE ENTIRE EXISTING VALVE BOX WITH NEW AS PER W-150 & W-151.
2. INSTALL CONCRETE COLLAR AROUND VALVE BOX, 8" WIDTH PER STD. NO. W-150. CONCRETE SHALL BE CLASS 520-A-2500 WITH A MAXIMUM 3" SLUMP.
3. 3" ASPHALT CAP SHALL BE HOT MIX TYPE PER PUBLIC WORKS STANDARD DETAIL 132.

VALVE BOX RAISING

CITY OF MONTEREY PARK
PUBLIC WORKS DEPARTMENT - WATER DIVISION

STANDARD NO.

W-152

DRAWN	BY	DATE
	AM	10/02/24
REVISED	DZ	10/02/24
CHANGED	XX	XX/XX/XX

APPROVED
WATER UTILITY MANAGER


APPROVED
CITY ENGINEER

[Signature] DATE 12/10/24
[Signature] DATE 12/10/24

SHEET 1 OF 2

LIST OF MATERIAL

ITEM	DESCRIPTION
1	SCREW TYPE CAST IRON VALVE BOX, TYLER UNION 6860 OR BINGHAM & TAYLOR NO. 4906 (OR APPROVED EQUAL) WITH HEAVY DUTY TOP SECTION
2	BINGHAM & TAYLOR, MARK V ROUND 10" RIM WITH FLANGE AND ROUND 10" LID WITH 4" SKIRT

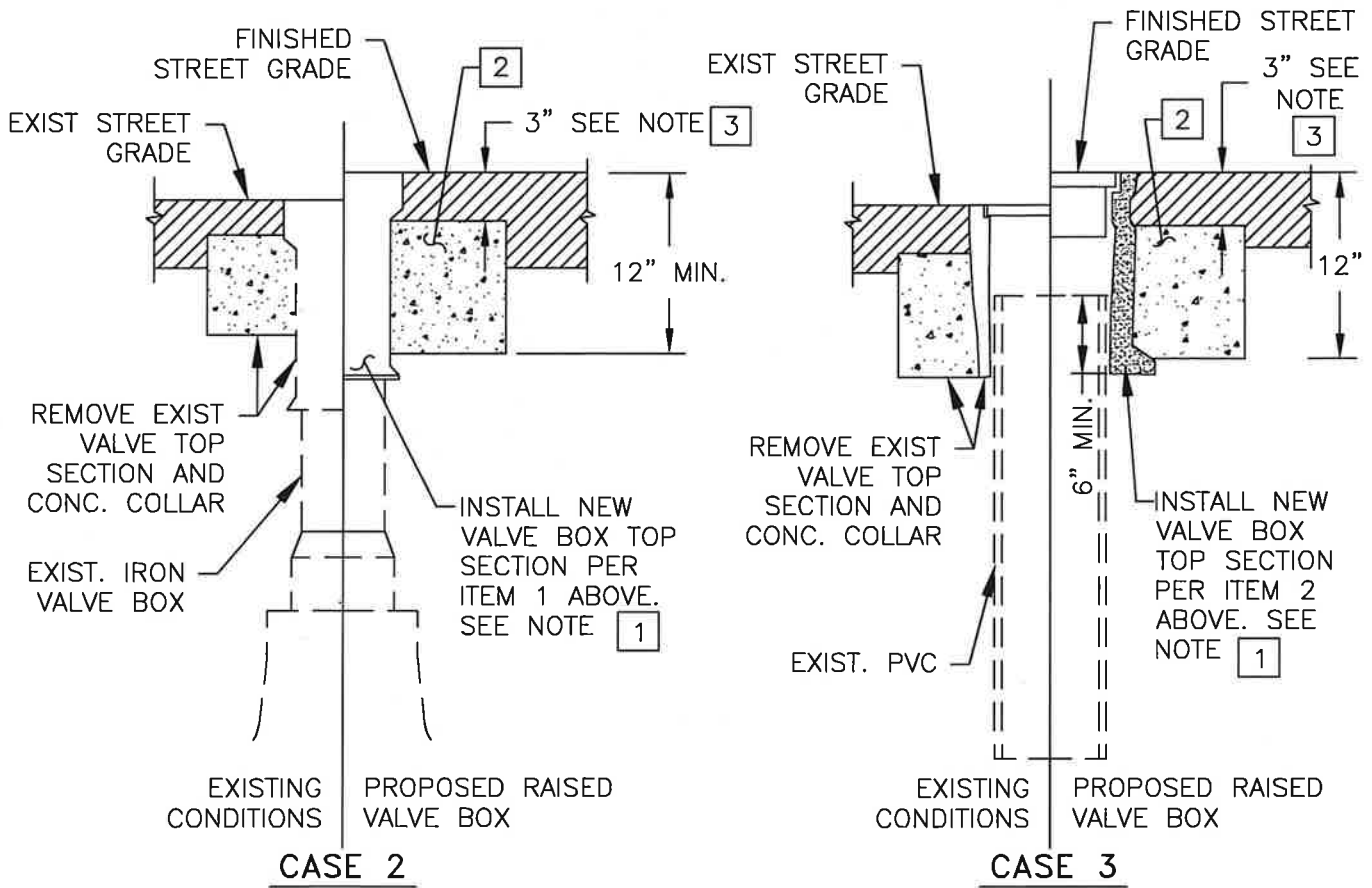

NOTES:

1. CONTRACTOR TO EXPOSE THE EXISTING VALVE BOX FOR THE WATER UTILITY INSPECTOR TO DETERMINE CONDITION OF EXISTING BOX. INSPECTOR SHALL DIRECT CONTRACTOR TO REPLACE THE TOP SECTION OF VALVE BOX AS SHOWN OR DIRECT CONTRACTOR TO REMOVE AND REPLACE ENTIRE EXISTING VALVE BOX WITH NEW AS PER W-150 & W-151.
2. INSTALL CONCRETE COLLAR AROUND VALVE BOX, 8" WIDTH PER STD. NO. W-150. CONCRETE SHALL BE CLASS 520-A-2500 WITH A MAXIMUM 3" SLUMP.
3. 3" ASPHALT CAP SHALL BE HOT MIX TYPE PER PUBLIC WORKS STANDARD DETAIL 132.

VALVE BOX RAISING

CITY OF MONTEREY PARK

PUBLIC WORKS DEPARTMENT - WATER DIVISION

STANDARD NO.

W-152

	BY	DATE
DRAWN	AM	10/02/24
REVISED	DZ	10/02/24
CHANGED	XX	XX/XX/XX

APPROVED
WATER UTILITY MANAGER

[Signature]

DATE

12/10/24

APPROVED
CITY ENGINEER

DATE

12/17/24

SHEET 2 OF 2